FLOOR PLAN NOTES:

- ALL INT. DIM. ARE FROM FACE-OF-STUD TO FACE-OF-STUD
- ALL INTERIOR WALLS TO BE 3 5/8" OR 6" METAL STUDS @ 16" O.C. (SEE FLOOR PLAN FOR SIZE) W/ 5/8" GYPSUM BD. BOTH SIDES
- ALL WALL LOCATIONS EXCEPT FOR TOILET ROOM WALLS TO BE VERIFIED WITH INTERIOR DESIGNER.
- PROVIDE 3 1/2" SOUND BATT INSULATION AROUND PERIMETER OF TOILET ROOM
- PROVIDE WOOD BLOCKING FOR ALL GRAB BARS @ 3'-0" A.F.F. AS SHOWN ON TOILET ROOM ELEVATIONS.
- MISCELLANEOUS HARDWARE INCLUDED: HANDICAP HARDWARE, MEN'S & WOMEN'S REST ROOM SIGNS
- PROVIDE WOOD BLOCKING FOR ANY FURNISHINGS BY OWNER (VERIFY LOCATIONS)
- ALL CABINETS & COUNTERTOPS TO HAVE PLASTIC LAMINATE FRONTS & TOPS
- ALL CABINETRY & EQUIPMENT TO BE VERIFIED BY OWNER
- FOOD PREP AREA TO BE VERIFIED W/ OWNER. PROVIDE SHOP DRAWINGS ON EQUIPMENT
- ALL EXTERIOR WINDOWS TO HAVE GYP. BD. RETURNS @ HEAD & JAMBS AND PLASTIC LAMINATE COVERED WOOD SILLS.
- WATER HEATER SHALL BE DIRECT VENTED, SEALED COMBUSTION OR ELECTRIC.
- VERIFY SIZE OF COOLER/FREEZER W/ SUPPLIER
- PROVIDE FIRE EXTINGUISHERS @ MIN. 75' PER IBC 906.1

TYP. FLOOR PLAN SYMBOLS:

- EXIT SIGN
- FIRE EXTINGUISHER SEE DETAIL ON SHEET
- FIRE EXTINGUISHER W/ CABINET SEE DETAIL ON SHEET

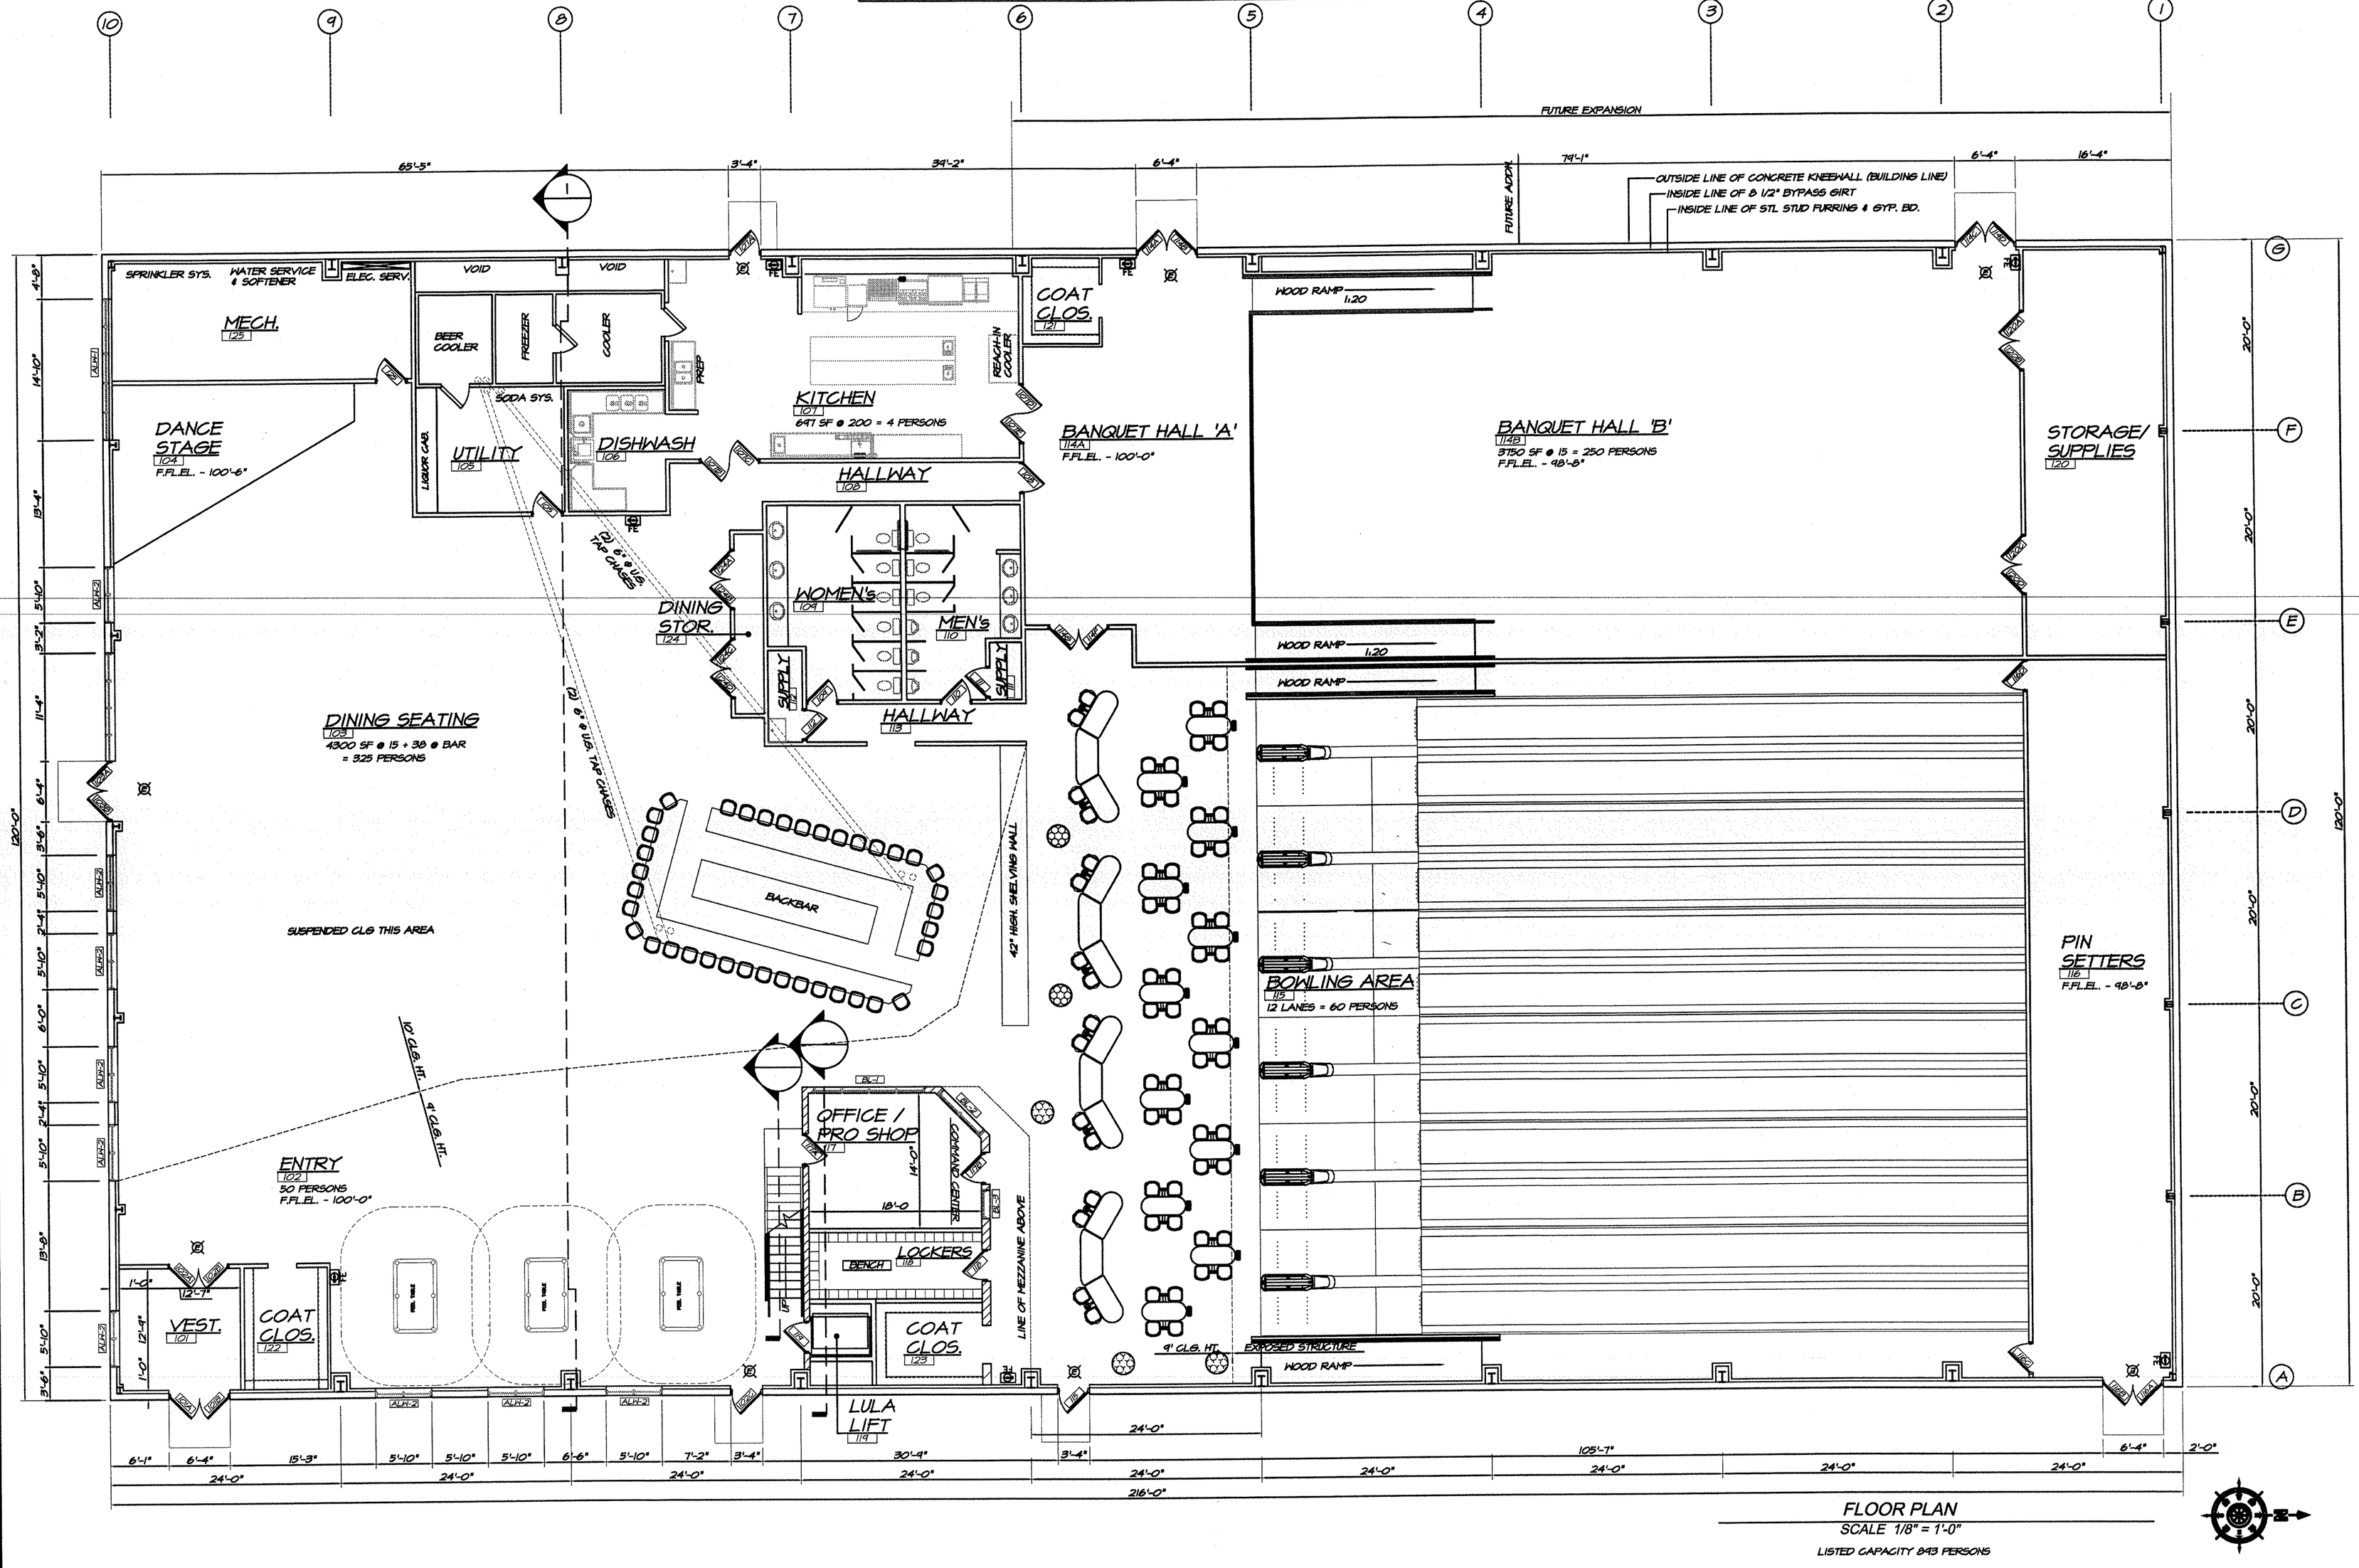

FLOOR PLAN

SCALE 1/8" = 1'-0"

LISTED CAPACITY 843 PERSONS

REVISIONS

11/9/05
11/12/05
12/27/05
1-25-06

BAUER ENGINEERING LLC
1037 S. GEORGETOWN TERRACE
BEAVER DAM, WISC. 53916
920 885-4966 FAX: 920 887-0221

OWNER: ROBERT GANSKE
140 N. DICKASON BLVD.
COLUMBUS, WI 53925

PROJECT: BOBBY G's BOWL N BAR
INDUSTRIAL DRIVE
COLUMBUS, WI 53925

DATE: DEC. 7, 2005
PROJECT NO.: 05G102

SHEET 2 OF